


Overview

The Yamaha MY16-AT is an optional digital I/O card for compatible Yamaha digital mixing consoles and signal processors. It provides 16 inputs and 16 outputs for 24-bit, 44.1/48 kHz uncompressed ADAT compliant digital audio.

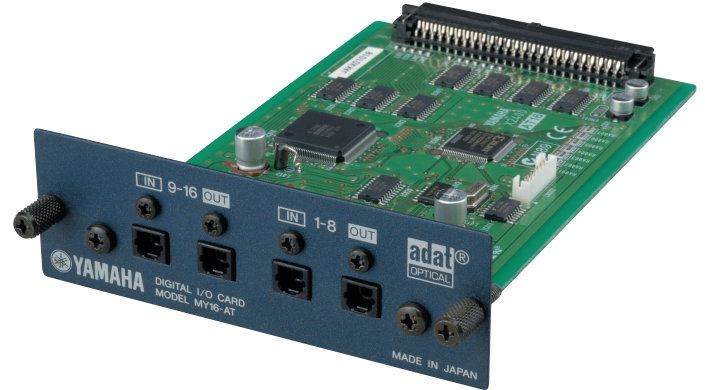

Features

- 24bit resolution, 16-in/16-out ADAT interface (8-in/8-out at 96kHz)
- 4 x Optical connectors
- Dimensions: 120mm x 40mm x 176mm (4.7" x 1.6" x 6.9")


Specifications

General Specifications

Channel Count	16IN / 16OUT
Format	ADAT
Connector	4 x TOS LINK
Resolution	24bit

Dimensions

Unit: mm (inch)

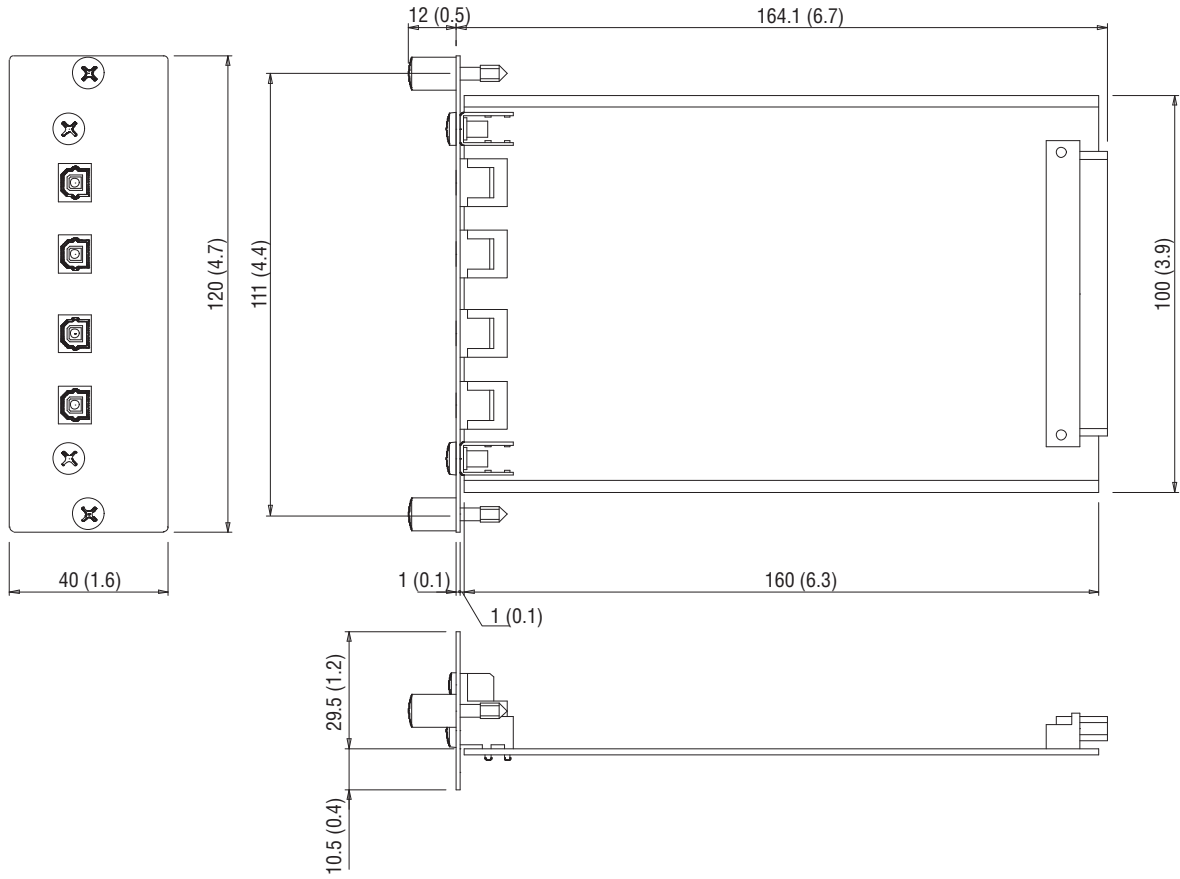

Architectural and Engineering Specifications

The Yamaha MY16-AT shall be an optional digital I/O card for compatible Yamaha digital mixing consoles and signal processors. It shall provide 16 inputs and 16 outputs for 24-bit, 44.1/48 kHz uncompressed ADAT compliant digital audio. Four TOSLINK connectors shall be provided for input and output connection. Dimensions shall be 120 (W) x 40 (H) x 176 (D) mm.

*All information subject to change without notice.

*All trademarks and registered trademarks are property of their respective owners.

Created in March, 2017

YAMAHA CORPORATION
P.O.BOX 1, Hamamatsu Japan
www.yamahaproaudio.com